



Analog Clocks

Traditional Series Analog Clocks

Utilizing the power of GPS and Network Time Protocol (NTP), Primex Analog Clocks perfectly synchronize to improve workflow, accountability and productivity. They synchronize seamlessly with your Primex 72MHz/GPS XR Series system using our proprietary 72MHz signal that transmits easily through common building materials and across longer distances with less potential for signal interference.

Accurate Time Throughout the Facility

Our Traditional Series Clocks feature easy-to-read dials and durable thermoplastic frames and lenses, making them ideal for many applications. Available in a variety of colors, sizes and dial options.

TRADITIONAL SERIES BATTERY MODELS

Part No.	Description
14280	9" (22.86cm) Black
14155	12.5" (31.75cm) Black
14159	12.5" (31.75cm) White
14163	16" (40.64cm) Black



9" Traditional Series

TRADITIONAL SERIES ELECTRIC MODELS

Part No.	Description
14155V	12.5" (31.75cm) 24VAC Black
14155E	12.5" (31.75cm) 120VAC Black
14159E	12.5" (31.75cm) 120VAC White
14163V	16" (40.64cm) 24VAC Black
14163E	16" (40.64cm) 120VAC Black

TRADITIONAL SERIES BATTERY MODELS - REMOTE ANTENNA

Part No.	Description
14244	12.5" (31.75cm) Black, Remote Antenna Clock
14465	12.5" (31.75cm) White, Remote Antenna Clock



12.5" or 16"
Traditional Series

Dual Clock Kit

Create an easy-to-read dual-sided clock for hallways or other large areas with our Dual Clock Kit. The kit includes a bracket, mounting plate and hardware to easily assemble and install two 12.5" (31.8cm) Traditional Clocks back to back.

DUAL CLOCK KIT

Part No.	Description
14289	Black - Fits 12.5" (31.8cm) Traditional Series Clock
14289W	White - Fits 12.5" (31.75cm) Traditional Series Clock



12.5" Dual-Sided
Traditional Series

TRADITIONAL SERIES CLOCK SPECIFICATIONS:

- Durable thermoplastic frames and lenses
- Automatically adjust for Daylight Saving Time
- Operating range: 32° - 158°F (0° - 70°C)
- Clock Lock available on most models features two uniquely shaped hangers that require a sequence of movements to install and remove the clock.
- Customized clock faces are available to display your organization's name or logo. Please call for more information.

Single-Sided Model

- Three sizes available: 9" (22.86cm); 12.5" (31.75cm) or 16" (40.64cm) diameter
- Single clock depth: 2.5" (6.4cm)

Dual-Sided Model

- 12.5" (31.75cm) diameter
- Mount to wall or ceiling
- Ideal for hallway applications to view from many angles
- Easy to assemble

Battery Models


- 9" (22.86cm) Clocks require (2) C-cell alkaline batteries (not included)
- 12.5" (31.75cm) Clocks require (2) D-cell alkaline batteries (not included)
- 16" (40.64cm) Clocks require (2) D-cell alkaline batteries (not included)

Electric (AC)

- Power Supply 100-240 VAC, UL Listed, 18" (45.72cm) cord with plug
- 120 VAC: 67mA
- 24 VAC operates at 18-28 VAC
- 12" (30.5cm) 18 AWG input leads

Battery Numbers

- 14890 (2) D-cell alkaline batteries
- 14889 (2) C-cell alkaline batteries

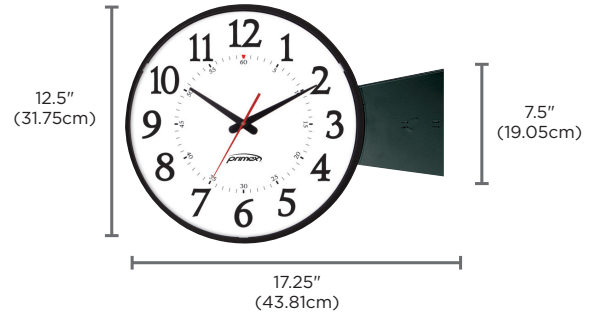

Remote Antenna Clock

To Learn More:
Call 800.537.0464
Email: info@primexinc.com

primexinc.com